



## Technical Specifications




# SINGLE DIAPHRAGM CONDENSER MICROPHONE B-5

Gold-Sputtered Diaphragm Studio Condenser Microphone  
with 2 Interchangeable Capsules


# SINGLE DIAPHRAGM CONDENSER MICROPHONE B-5

## Gold-Sputtered Diaphragm Studio Condenser Microphone with 2 Interchangeable Capsules


- Professional gold-sputtered diaphragm condenser microphone for unsurpassed audio quality
- Ideal as main and support microphone for studio and live applications—perfect for acoustic instruments and overhead etc.
- 2 interchangeable capsules with cardioid and omnidirectional pickup patterns
- Pressure-gradient transducer with shock-mounted gold-sputtered diaphragm capsule
- Switchable low-frequency roll-off and input attenuation
- Ultra low-noise transformerless FET input eliminates low-frequency distortion
- Gold-plated 3-pin XLR output connector for highest signal integrity
- Rugged construction with satin nickel-plated brass body
- Stand adapter, windscreen and transport case included
- High-quality components and exceptionally rugged construction ensure long life
- Conceived and designed by BEHRINGER Germany

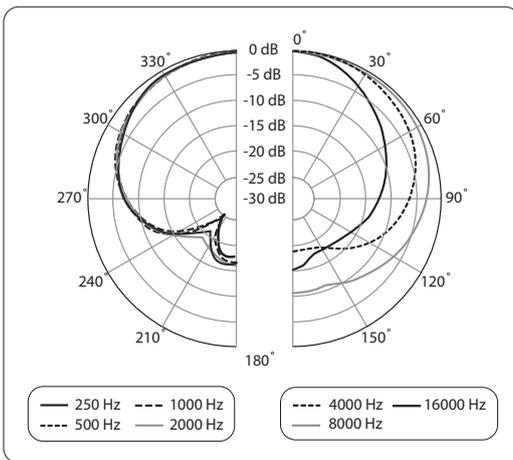


Polar pattern (cardioid)

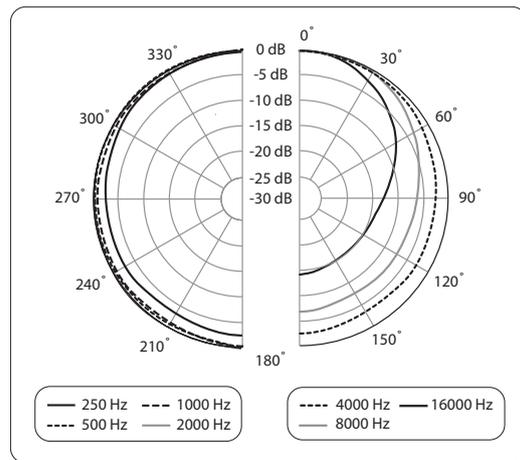

Polar pattern (omnidirectional)

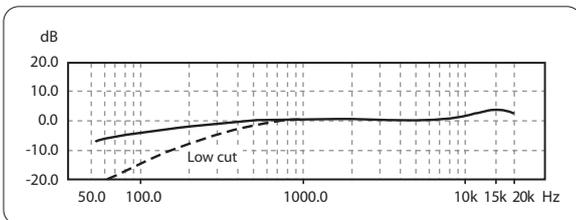

Frequency response (cardioid)

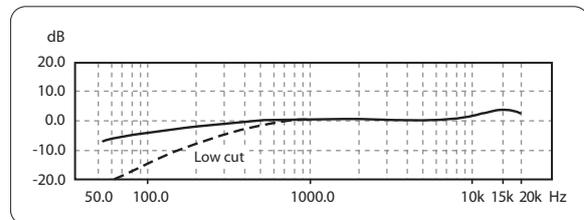

Frequency response (omnidirectional)

## Specifications

Transducer type	true condenser, 18 mm (0.71") single diaphragm
-----------------	---

### Operating Principle

Cardioid	pressure gradient
Omnidirectional	pressure operated
Polar pattern	1 x cardioid 1 x omnidirectional, exchangeable
Connection	gold-plated balanced XLR connector

### Open Circuit Sensitivity (at 1 kHz)

Cardioid	-38 dBV (0 dBV = 1 V/Pa), 12.6 mV/Pa
Omnidirectional	-40 dBV (0 dBV = 1 V/Pa), 10 mV/Pa
Frequency response	20 Hz - 20 kHz
Level attenuation	-10 dB (switchable)
Low-cut filter	6 dB/oct. at 150 Hz (switchable)
Max. SPL (1% THD @ 1 kHz)	140 dB (0 dB), 150 dB (-10 dB)
Equivalent SPL (IEC 651)	16 dB-A (cardioid), 18 dB-A (omnidir.)

### Signal-to-Noise Ratio

Cardioid	78 dB A-weighted
Omnidirectional	76 dB A-weighted
Nominal impedance	70 $\Omega$
Load impedance	>1 k $\Omega$

### Mains Voltage/Fuse

Supply voltage	+48 V
Supply current	3 mA
Physical/Weight	
Dimensions	$\emptyset$ shaft: 20 mm / Length: 120 mm
Weight	approx. 0.21 lbs / 0.09 kg

BEHRINGER is constantly striving to maintain the highest professional standards. As a result of these efforts, modifications may be made from time to time to existing products without prior notice. Specifications and appearance may differ from those listed or illustrated.

TECHNICAL SPECIFICATIONS AND APPEARANCES ARE SUBJECT TO CHANGE WITHOUT NOTICE AND ACCURACY IS NOT GUARANTEED. BEHRINGER IS PART OF THE MUSIC GROUP (MUSIC-GROUP.COM). THE INFORMATION CONTAINED HEREIN IS CORRECT AT THE TIME OF PRINTING. ALL TRADEMARKS ARE THE PROPERTY OF THEIR RESPECTIVE OWNERS. MUSIC GROUP ACCEPTS NO LIABILITY FOR ANY LOSS WHICH MAY BE SUFFERED BY ANY PERSON WHO RELIES EITHER WHOLLY OR IN PART UPON ANY DESCRIPTION, PHOTOGRAPH OR STATEMENT CONTAINED HEREIN. COLORS AND SPECIFICATIONS MAY VARY FROM ACTUAL PRODUCT. MUSIC GROUP PRODUCTS ARE SOLD THROUGH AUTHORIZED FULLFILLERS AND RESELLERS ONLY. FULLFILLERS AND RESELLERS ARE NOT AGENTS OF MUSIC GROUP AND HAVE ABSOLUTELY NO AUTHORITY TO BIND MUSIC GROUP BY ANY EXPRESS OR IMPLIED UNDERTAKING OR REPRESENTATION. THIS MANUAL IS COPYRIGHTED. NO PART OF THIS MANUAL MAY BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING AND RECORDING OF ANY KIND, FOR ANY PURPOSE, WITHOUT THE EXPRESS WRITTEN PERMISSION OF MUSIC GROUP IP LTD. ALL RIGHTS RESERVED. © 2011 MUSIC GROUP IP LTD. TRIDENT CHAMBERS, WICKHAMS CAY, P.O. BOX 146, ROAD TOWN, TORTOLA, BRITISH VIRGIN ISLANDS