






## VRC SERIES, ACTIVE PA MIXER CABINET

### VRC-210

<b>Description</b>		The VRC-210 portable PA system offers an ideal solution for bands, conference, DJ, fitness, education and more. With its lightweight 10" enclosures, the VRC-210 allows for easy transportation and quick and simple setup. The integrated 6 channel mixer enables multiple instruments and microphones to be connected and mixed simultaneously. The integrated 16 digital effects ensure that your vocals or instruments have depth to their sound. The on-board media player includes USB, SD card and Bluetooth inputs, ensuring that music or backing tracks can be easily played through the system. The VRC-210 offers many solutions within one affordable, lightweight and portable package.
Model		VRC-210
Description		VECTOR by HH VRC-210 - Portable PA Combination System - 2x500W - 6 channel mixer with Bluetooth and DSP
<b>Amplifier</b>		
Power Rating		2x 500W Peak
Amplifier Type		Class D
Power Supply		SMPS (100-120 or 220-240 fixed)
Power Consumption		300W (Maximum)
<b>Features</b>		
Inputs		4x balanced Combi XLR/Jack with mic/line switch, 2x 6.3mm single ended jack inputs, 2x RCA inputs, Media player with Bluetooth 5.0, USB and SD card
Outputs		RCA mix out. 2x 6.3mm Jack speaker outputs
Controls		CH1-4 gain, 2 band eq, effect send, mic/line switch, CH5-6 gain, Master 16 digital effect section with level, Master 2 band eq, master volume, Phantom power.
<b>Speaker</b>		
HF Driver		1" Compression Driver
LF Driver		10" Woofer
Coverage		90°H X 40°V
<b>Enclosure</b>		
Cabinet		Robust polypropylene cabinet with carry handle
Finish		Black
Grille		Powdercoated steel
Other		35mm Distance Pole Socket
Unit dimensions (HWD)		49 x 31.5 x 31.2 CM 19.3" x 12.4" x 12.3"
Unit weight		18.7Kg, 41.2 lbs
Carton dimensions (HWD)		55.5 x 63.5 x 36.5 CM 21.9" x 25" x 14.4" , 0.129 M3
Packed weight		19.5Kg, 43 lbs



UNOFFICIAL PHOTOGRAPHY

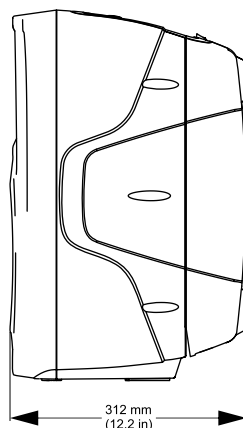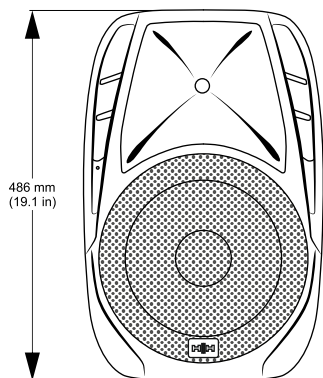

- 1 Measured in Full space (4m) conditions  
2 Calculated maximum SPL based on rated power handling  
3 AES standard, pink noise with 6 dB crest factor, free air.

